




KCDJD-4810M

Catalogue

Double Machine_04

Double Knit Electronic Selection
Electronic Jacquard Knitting Machine

Double Knit Double Selection
Electronic Jacquard Knitting Machine

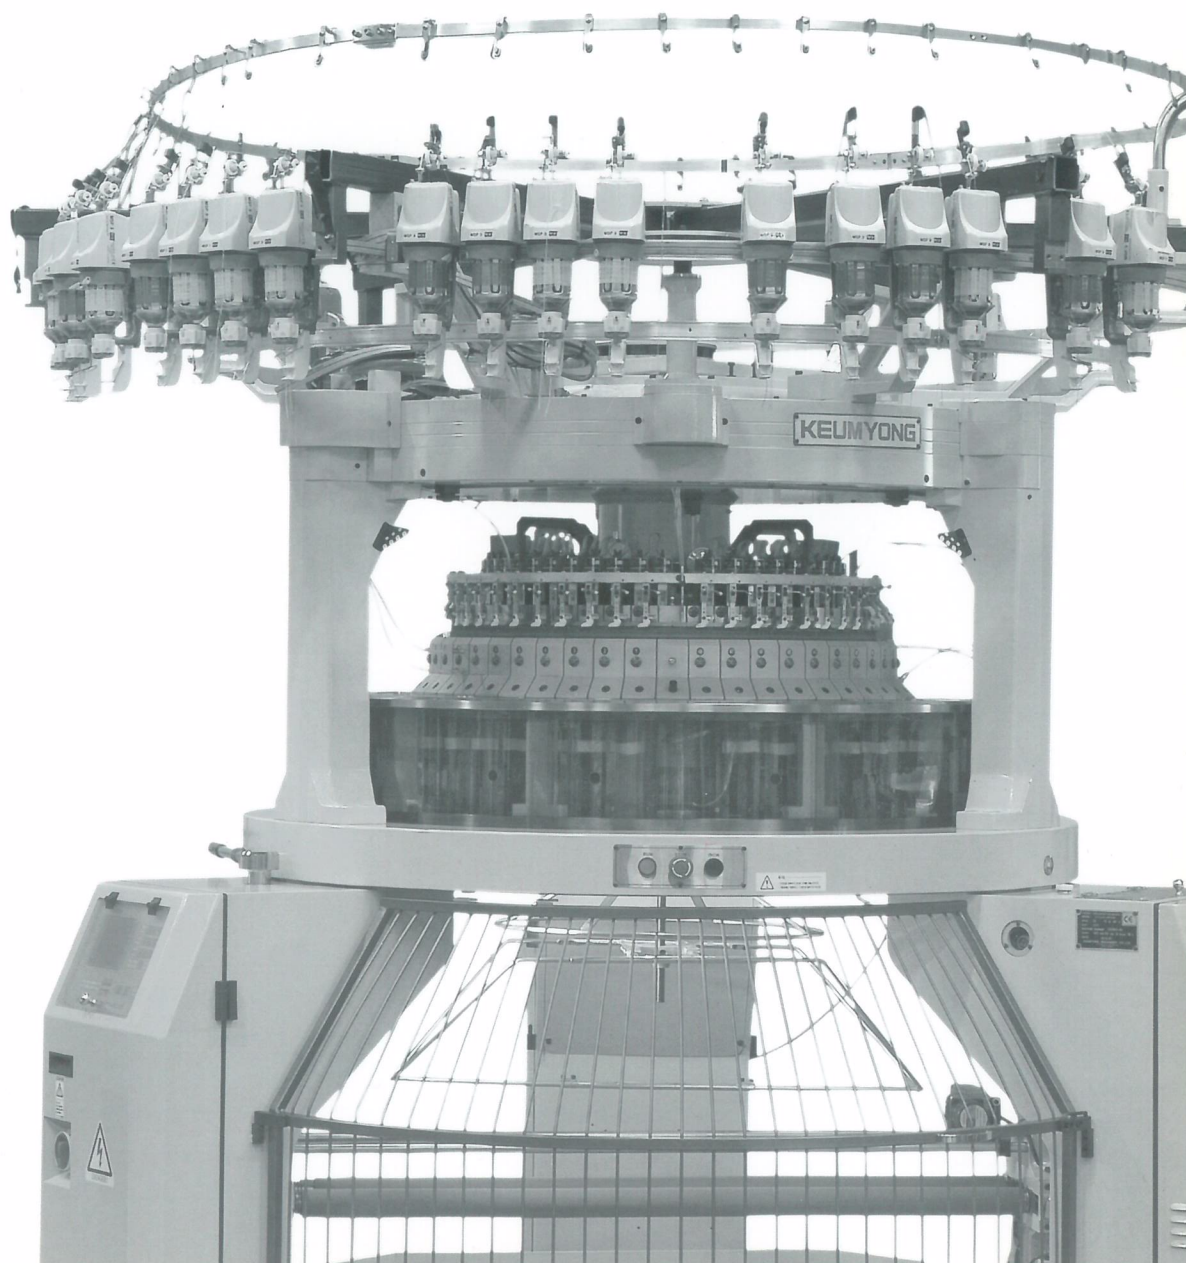

KCDJD-4810M

Double Knit Double Selection Electronic Jacquard Kn

Double Knit jacquard with fully electronic machine makes new market and ere in home textile application garment & for the shoe fabric

Precise and perfect individual needle selection and unlimited pattern designs create quality jacquard and special production in garment and home textile industry.



STRUCTURE



KCDJD-4810M

Especially developed as Double-Electronic Jacquard machine with electronic needle selection bith in cylinder and diai. (2&3 position technique)


To create fashionable and stylish fabric in home textile also garment & shoe fabric industry. this model is developed with the full jacquard structure of two & three technical way.

DIAMETER	GAUGE(N.P.I)	FEEDS	SPEED(R.P.M)
30"	12-22	48F	16-18
34"	12-22	54F	14-16
36"	12-22	60F	12-15

KCDJD-4810M

Diameter	30Dia / 34Dia / 36Doa / 38Dia				
Gauge	12G to 22G				
No.of Feeder	48F / 54F / 56F / 60F				
No.of Needle(Cut)	DIAMETER	12G	14G	16G	18G
	30"	1128	1320	1512	2064
	34"	1272	1488	1704	2352
	36"	1368	1584	1800	2472
	38"	1440	1680	1896	2660
Feeding Device	Storage Feeder				
Driving	7.5HP AC Motor & Inverter				
Computer Controller	WAC Controller, WAC Actuaror				
Cylinder	Dial Cam	Stucture			
-3 Position needles Selection by WAC (Knit,Tuck & Welt)	-2 Position needles Selection by WAC with support function	-Full jacquard with 3position needle selection in cylinder			

- Needle selection at both cyliner and dial by WAC actuator.
- Cylinder 3 position needles selection.
- Dial 2 position needles selection.
- Unlimited creativity in pattern design.
- Pattern save & storage in USB stick.



STANDARD SPECIFICATIONS

- Cylinder diameter, needles per inch, number of Feeds as described above, so please order the machine according to requirements.
- AC motor with inverter control unit.

CYLINDER DIAMETER	12"~28"	30"~38"
AC MOTOR	3.75kw	5.5kw



- Dial and cylinder needle detectors.
- Positive yarn feeding device.
- Tube-side creel with double tie.
- Venti-Cleaner.
- Spreader size ring system.
- Oil mist lubricator for needles and cams with dust blower.
- Speed of machine depending upon yarn used, Knitting condition, gauge etc, the machine speed can be either increased or decreased.
- The speed figures on this table are given only as guide.

OPTION

- KYMS (Keumyong Yarn Measuring System)
 - Elastomeric yarn feeding device
 - Pattern Design software
- High leg type frame for big roll
- Real time production monitoring system
 - Take-up device
 - Fabric cutting device



INTEGRATED CONTROLLER

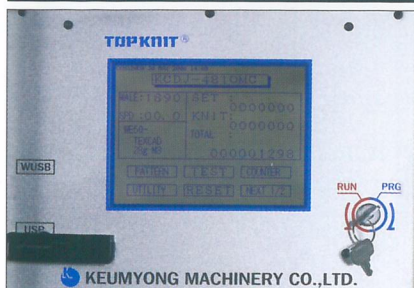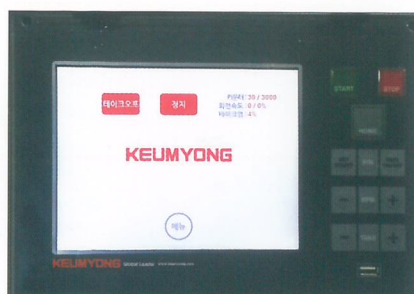

- Fully integrated driving control mode with characters and graphic.
- Self-diagnostic and alarm function.
- Auto take-down tension and speed control system.
- Easy setting method and bar-graphic digital indicating for all functions.




PACKING DIMENSIONS

KCDJD-4810M	30" DIAMETER
Approx. Net weight	3,000kg
Approx. Gross weight	3,300kg
Case size(mm)	2,390 X 2,250 X 2,300 Length Width Height



STANDARD DIMENSIONS

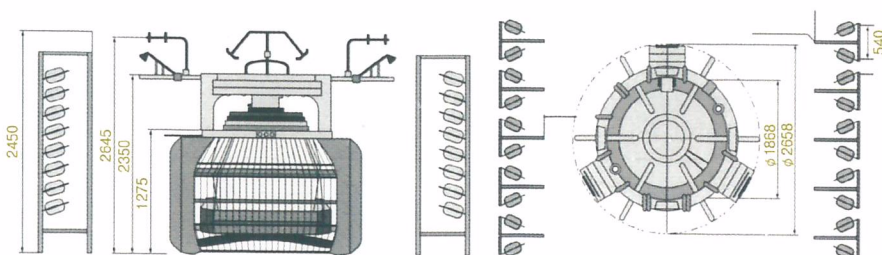

KEUMYONG

Homepage

www.keumyong.com

E-mail

kymc@keumyong

Head Office & Mfg

ADDRESS 57' Paldal-ro 7-gil' Daegu' KOREA
TEL +82-53-351-3081~7
FAX +82-53-351-8085

Seoul Office

ADDRESS 4TH FLOOR' KEUMYONG BLDG' 275' Gwangnaru-ro' Seongdong-gu' Seoul' KOREA
TEL +82-2-3409-4700/4231~3
FAX +82-2-3409-4040

