




KDMJ-72V

Double Knit Mini-Jacquard Knitting Machine

Catalogue

Double Machine_06

Double Knit Mini-Jacquard Knitting Machine

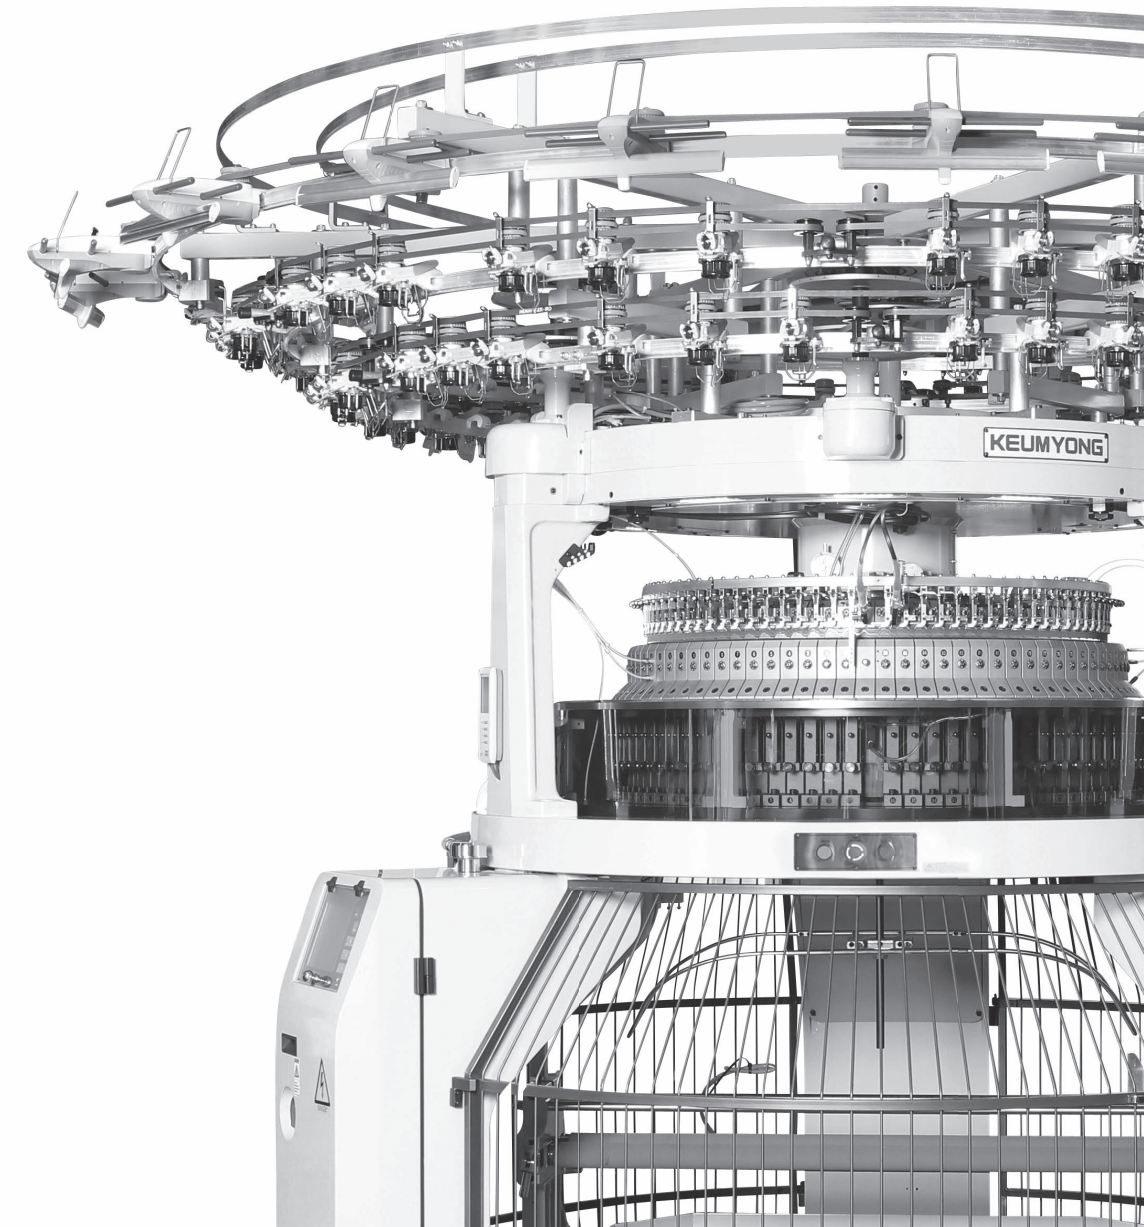

KEUMYONG

Homepage www.keumyong.com
E-mail kymc@keumyong.com

Head Office & Mfg **ADDRESS** 57, Paldal-ro 7-gil, Buk-gu, Daegu, KOREA
TEL +82-53-351-3081~7
FAX +82-53-351-8085


Seoul Office **ADDRESS** 4TH FLOOR, KEUMYONG BLDG. , 275, Gwangnaru-ro, Seongdong-gu, Seoul, KOREA
TEL +82-2-3409-4700/4231~3
FAX +82-2-3409-4040



KDMJ-72V

Double Knit Mini-Jacquard Knitting Machine

Model is the latest 3-position technology for advanced double knit mini-Jacquard machine. patterns are adjusted by hand with fast, simple and unlimited 3-position(knit,tuck,miss) technique to produce any patterns.

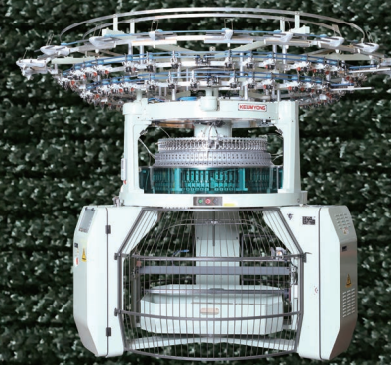


STANDARD SPECIFICATIONS


- The dial cam race has 2 needle tracks. Both types of needles are independently adjustable to the missing, tucking, knitting and supporting.
- The cylinder cam has 3 position needle selection by 36 steps of selector with semi closed cam system.

OPTIONAL PARTS

- KYMS(Keumyong Yarn Measuring System)
 - Elastane yarn feeding device
 - Positive yarn feeding device
- High leg type frame for big roll
- Real time production monitoring system
 - Take-up device
 - Fabric cutting device



STRUCTURE

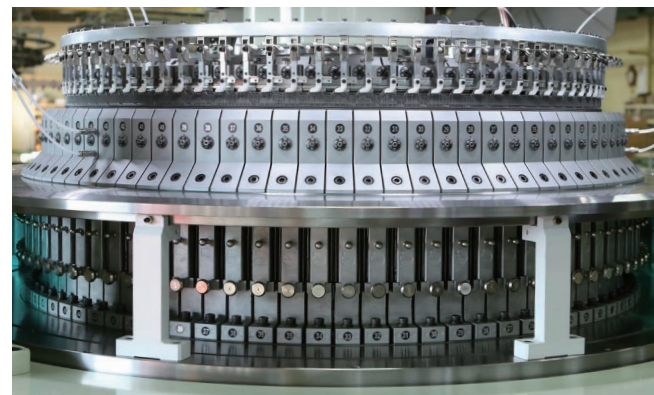

FABRIC POTENTIAL

Double jersey knitting constructions of 2 to 3 colors Jacquard pattern single & double blister interlock, interlock pique, eightlock, punto diroma, milano rib tuck, stitch miss stitch, double pique, crepe and more.



FABRIC VARIETY


KDMJ-72V

DIAMETER(Inch)	30"	34"	36"	38"
Gauge	20G-28G			
No. of Feeder	60F/72F	68F/84F	72F/84F	76F/92F
No. of needle(cut)	20G/1,872	20G/2,124	20G/2,268	20G/2,376
	22G/2,088	22G/2,340	22G/2,484	22G/2,628
	24G/2,268	24G/2,556	24G/2,700	24G/2,880
	28G/2,628	28G/2,988	28G/3,168	28G/3,348
Speed(RPM)	18-22	18-22	17-21	15-19
Feeding Device	Positive Feeding Device			
Driving	7.5HP AC Motor & Inverter			
Cylinder Cam	3 Position of needle selection (Knit, Tuck & Miss) by 36 steps of selector			
Dial Cam race	2 needle tracks, Independently adjustable to Knit, Miss, Tuck & Supporting			
Structure	2 to 3 colors Jacquard pattern system			

- Needle selection at cylinder by selector
- Cylinder 3 position needles selection.
- Unlimited creativity in pattern designs.



INTEGRATED CONTROLLER

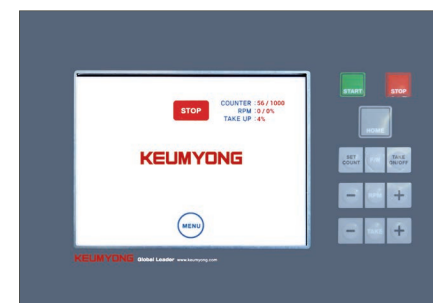

- Fully integrated driving control mode with characters and graphic.
- Self-diagnostic and alarm function.
- Auto take-down tension and speed control system.
- Easy setting method and bar-graphic digital indicating for all functions.



PACKING DIMENSIONS

KDMJ-72V	30" DIAMETER	36" DIAMETER
Approx. Net weight	3,100kg	3,400kg
Approx. Gross weight	3,700kg	4,000kg
Case size(mm)	2,460 X 2,270 X 2,250	2,460 X 2,270 X 2,250
(Variable)	Length Width Height	Length Width Height

*High leg : Approx. 200kg will be added to Net weight



STANDARD DIMENSIONS(30")

