



ACCREDITED BY  
THE DUTCH COUNCIL  
FOR CERTIFICATION  
Reg. No. 24

ISO-9001 CERTIFICATED FIRM  
DET NORSKE VERITAS INDUSTRY B.V., THE NETHERLANDS


# KILM-AV X

Double Knit Interlock Machine  
with Open Width Take-up Device

## Catalogue

### Double Machine\_01

Double Knit Interlock Machine  
with Open Width Take-up Device

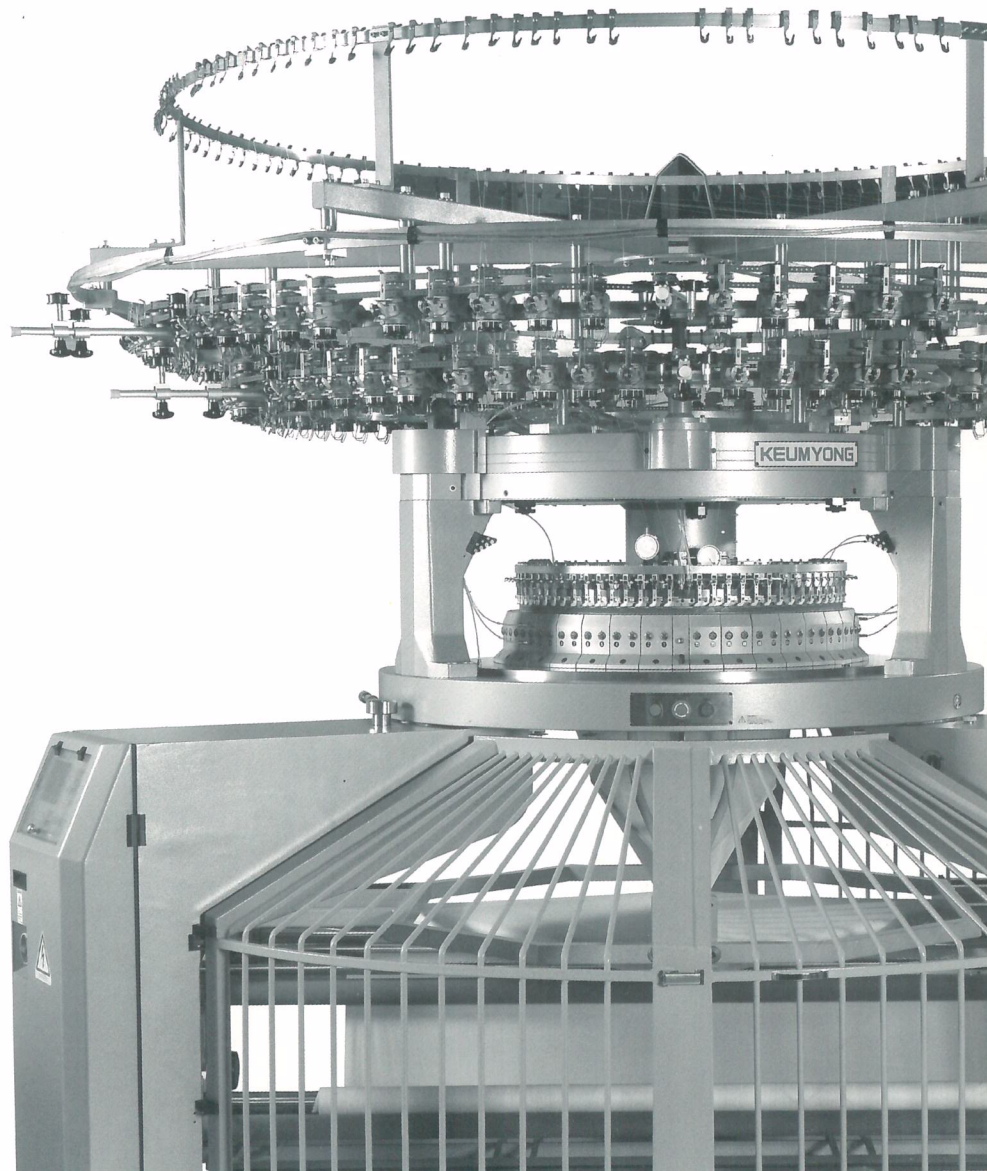





# KILM-AV X

High speed multi-purpose double knit machine with open width frame and a wide range of stitch for a top quality finish.

All of these furnish high production and easy pattern changing, and high production multi-purpose in rib or interlock knitting machine



## STRUCTURE

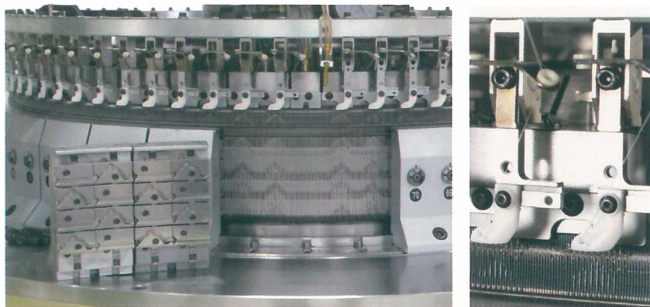

## FABRIC VARIETY



	DIAMETER	GAUGE(N.PI)	FEEDS	SPEED(R.P.M)
KILM-AV X	30"	18-32	72F/84F	28-32
	34"	18-32	72F/84F	25-28

- OPEN WIDTH FRAME (TAKE-UP)
- KILM-72AV X : 4 track cylinder, 2 track dial cams in 72 feeds range.
- KILM-84AV X : 4 track cylinder, 2 track dial cams in 84 feeds range.
- Delayed timing is standard. To change from delayed to synchronized timing, there is no need to exchange the yarn carriers and cams.

- KILM-72/84AV X : Single pique, Interlock, Eightlock, Swiss pique, French pique, Milano Rib, Ponte di roma, Lacoste and Flat back rib
- KILM-AV SERIES (Interlock machine)
- Interlock circular knitting machine with optional multi-feeders. per diametrical inch for the production of normal-size and body-size yard good from 12 inch to 22 inch in diameter





## STANDARD SPECIFICATIONS


- Cylinder diameter, needles per inch, number of feeds are described before, so please order the machine according to requirement.
- AC motor with inverter control unit.

CYLINDER DIAMETER	12"~28"	30"~34"
AC MOTOR	3.75kw	5.5kw

- Dial and cylinder needle detectors.
- Positive yarn feeding device.
- Oil mist lubricator for needle and cams with dust blower
- Speed of machine is depending on yarn used, knitting condition, gauge, etc.
- The machine speed is adjustable by Inverter.
- The speed figures on this table are given only as a guide.
- Optional equipment : conversion kit for tube form knitting.
- Tube-side creel with double tie.
- Venti-Cleaner
- Spreader size ring system.




## INTEGRATED CONTROLLER

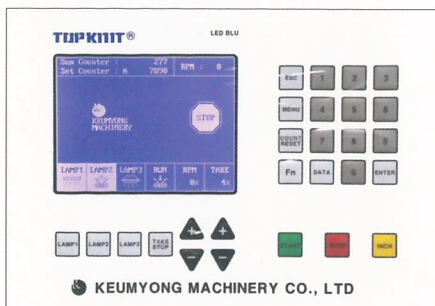

- Fully integrated driving control mode with characters and graphic.
- Self-diagnostic and alarm function.
- Auto take-down tension and speed control system.
- Easy setting method and bar-graphic digital indicating for all functions.



## OPEN WIDTH TAKE-UP

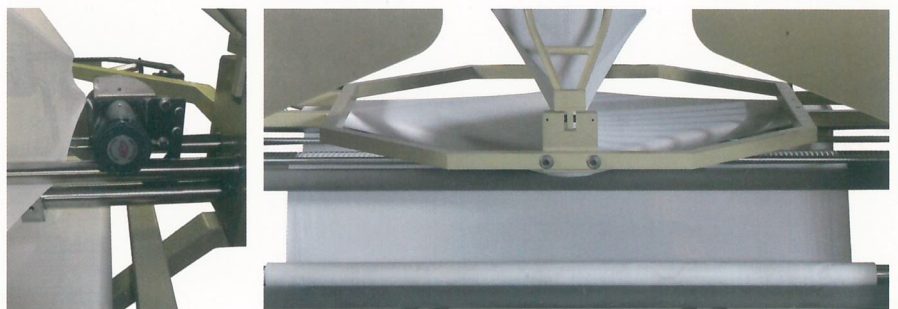

## PACKING DIMENSIONS

KILM-72/84AV X	30" DIAMETER
Approx. Net weight	3,300kg
Approx. Gross weight	3,800kg
Case size(mm)	3500 X 2300 X 2300
	Length Width Height

# KEUMYONG

---

Homepage [www.keumyong.com](http://www.keumyong.com)

E-mail [kymc@keumyong.com](mailto:kymc@keumyong.com)

**Head Office & Mfg** ADDRESS 666-1, Nowon-Dong 3-ga, Buk-gu, Daegu, KOREA  
TEL +82-53-351-3081~7  
FAX +82-53-351-8085

**Seoul Office** ADDRESS 4TH FLOOR, KEUMYONG BLDG. , 81-3, Songjeong-Dong, Sungdong-gu, Seoul, KOREA  
TEL +82-2-3409-4700/4231~3  
FAX +82-2-3409-4040

