



High Production
Inter-Rib Knitting Machine







KRB-2TIV

This model's cam system has been manufactured with completely closed cam system in such way to allow high operational speed, with the best stitch formation and high quality rib fabric which is utilized for the outer wear garments production and for underwear.

| MODEL | DIAMETER | GAUGE(N.P.I) | FEEDS | SPEED(R.P.M) |
|----------|----------|--------------|-------|--------------|
| KRB-2TIV | • 30" | 14-20 | 60F | 25-30 |
| | 32" | 14-20 | 64F | 23-27 |
| | 36" | 14-20 | 72F | 20-22 |
| | 40" | 14-20 | 80F | 17-20 |

^{*} One race cam system for each dial and cylinder

STANDARD SPECIFICATIONS

- *Cylinder diameter, needles per inch number of feeds are described as above, so please order the machine according to requirments
- *AC motor with inverter control unit.
- *Dial and cylinder needle detectors.
- *Positive yarn feeding device.
- *Tube-side creel with double tie.
- *Venti-Cleaner.
- *Oil mist lubricator for needles and cams with dust blower.
- *Spreader size ring system.
- *Speed of machine depending upon yarn used knitting condition, gauge etc, the machine speed can be either increased or decreased.

So please select the optimum speed for the machine according to machine condition.

The speed figures on this table are given only as guide.



MODEL: KRB-2TIV





OPTIONAL PARTS

- *Additional cams when increasing cam in cylinder and dial for fabric potential.
- *Plating fabrics can knitted provided yarn carrier.
- *Knitting Lycra yarns in plating construction by using Memminger MER system.

INTEGRATED CONTROLLER




- *Fully integrated driving control mode with character and graphic.
- *Self-diagnosis and alarm function.
- *Auto take-down tension and speed control system.

 Easy setting method and bar-graphic digital indicating for all functions.

PACKING DIMENSIONS

| KRB-2TIV | 30" DIAMETER | | |
|------------------------|------------------------------------|--|--|
| Approx.×Net weight | 2.700Kg | | |
| Approx. × Gross weight | 2.950Kg | | |
| Case size(mm) | Length Width Height 2370×2250×2300 | | |

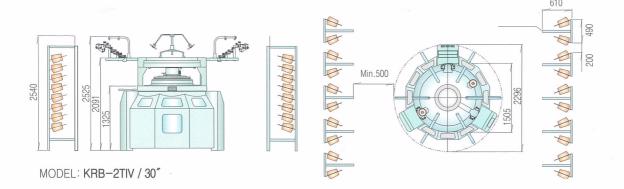

▶ Design by: 010-7596-4552 / 2017. 07

KEUMYONG

• Head office & Mfg: 57, Paldal-ro 7-gil, Buk-gu, Daegu, Korea

Telephone: +82-53-351-3081~7

Fax : +82-53-352-8085 • Seoul Office : 275, Gwangnaru-ro, Seongdong-gu, Seoul, Korea

Telephone: +82-2-3409-4700 / 4231~3

Fax : +82-2-3409-4040

• http://www.keumyong.com • E-mail:kymc@keumyong.com