


Homepage www.keumyong.com
E-mail kymc@keumyong.com

Head Office & Mfg ADDRESS 57, Paldal-ro 7-gil, Buk-gu, Daegu, KOREA
TEL +82-53-351-3081~7
FAX +82-53-351-8085

Seoul Office ADDRESS 4TH FLOOR, KEUMYONG BLDG., 275, Gwangnaru-ro, Seongdong-gu, Seoul, KOREA
TEL +82-2-3409-4700/4231~3
FAX +82-2-3409-4040

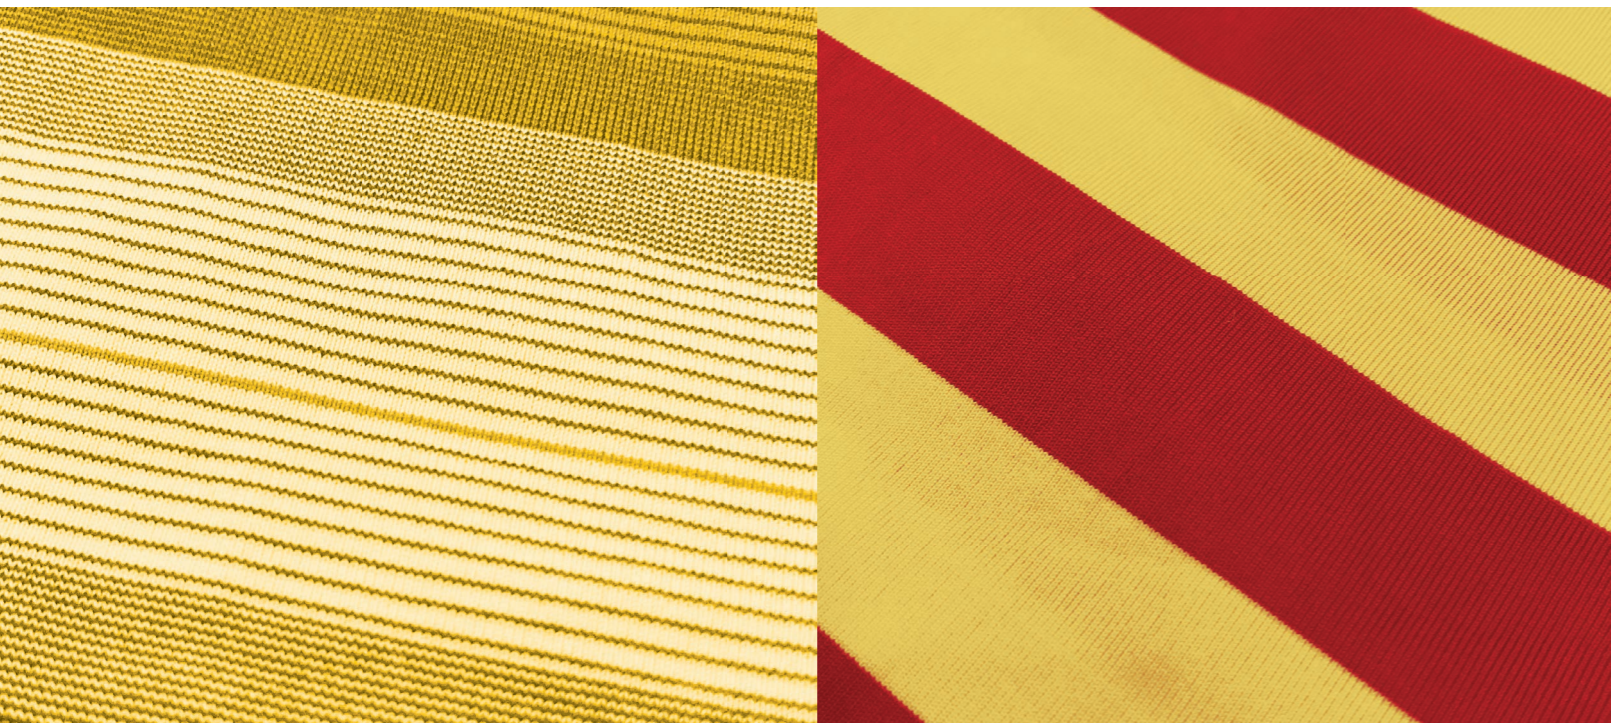


KSST-72

Single Jersey multi-Feeds Auto-Striper Knitting Machine

Catalogue

Single Machine_03

Single Jersey multi-Feeds Auto-Striper Knitting Machine

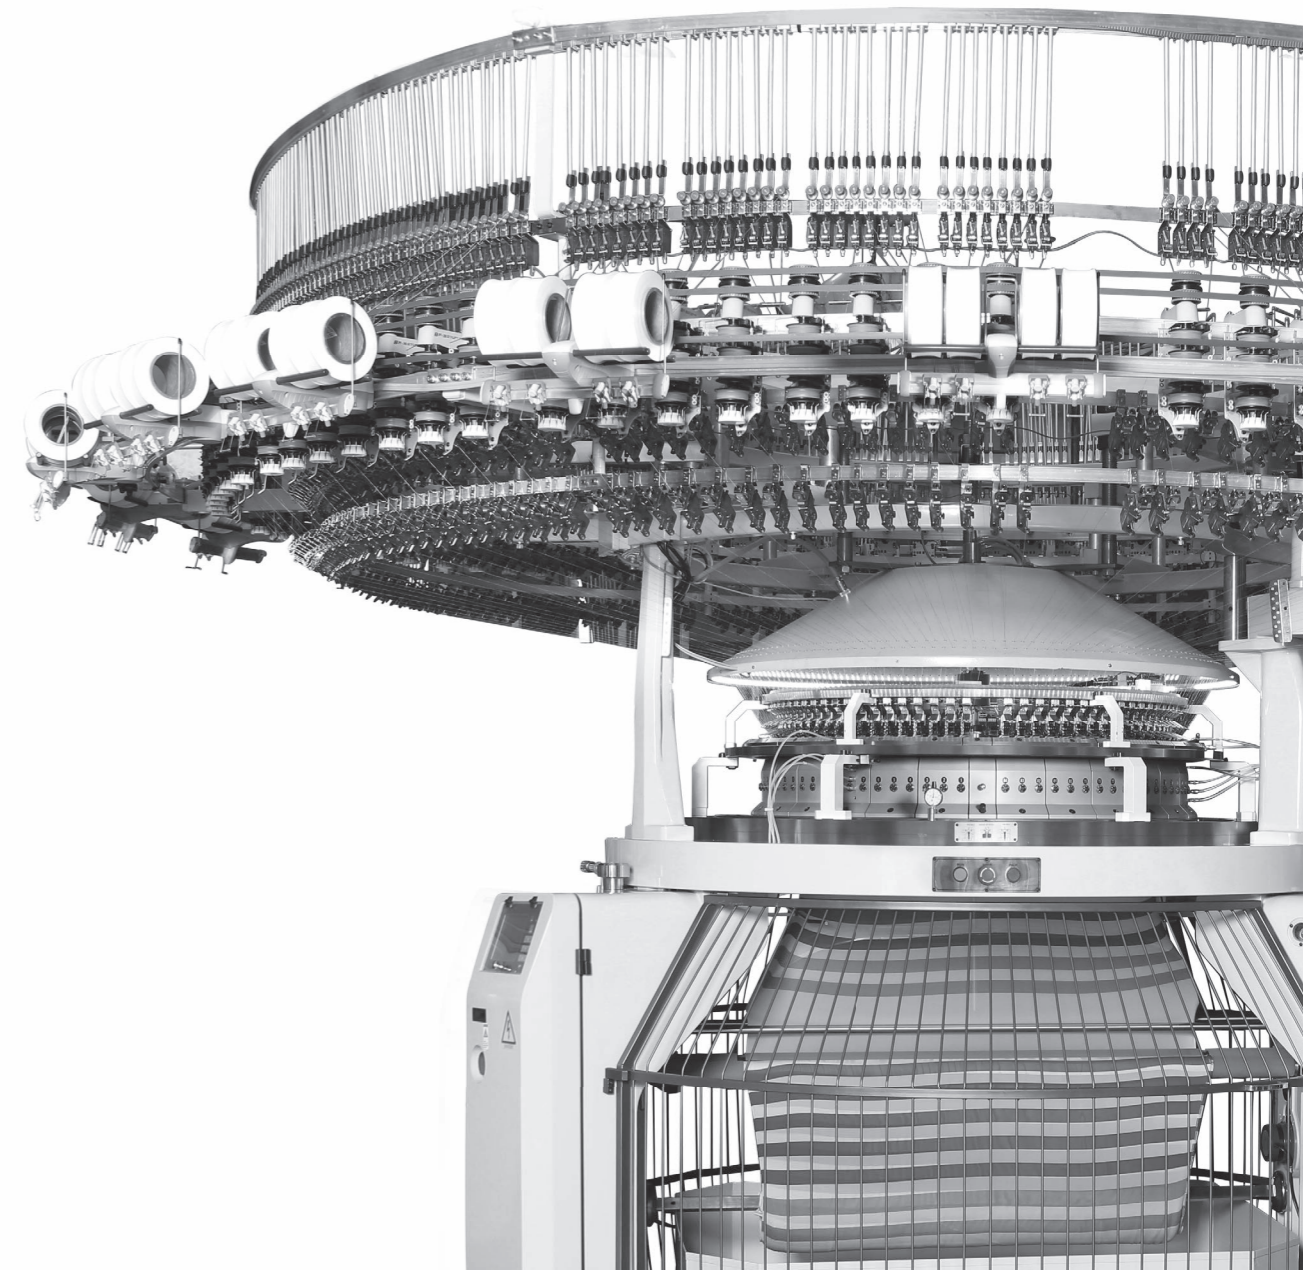


KSST-72

Single Jersey multi-Feeds Auto-Striper Knitting Machine

Model has been designed to make striper fabric with 4 colors & Multi feeds by using unique striper system.

This striper system has constructed by using simple mechanical structure for easy use and management. The striper patterns can be designed by using the computer pattern design program.

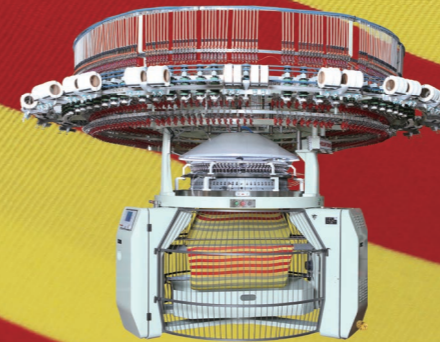

STANDARD SPECIFICATIONS

- Cylinder diameters, needles per inch, number of feeds are described before, so please order the machine according to requirements.
- Cylinder cams for machines with 2 to 4 cam tracks are 3 position select available by changing cams. For single jersey machines when machine is ordered with 4 cam tracks in the cylinder, 4 knit cams, 1 tuck and 1 welt cams are supplied with the machine as standard per feed. Others are optional.
- AC motor with inverter control unit.
- Plating fabrics can be knitted by provided yarn carrier and yarn carrier plates are purchased.
- Positive yarn feeding device.
- Side creel stand with double tie.
- Venti-Cleaner.
- Spreader size ring system.
- Speed of machine depending upon yarn used, knitting condition, gauge etc. The machine speed can be either increased or decreased. So please select the optimum speed for the machine according to the machine condition. The speed figures showed on this table are given only as a guide.

OPTIONAL PARTS

- High leg type frame for big roll
- Open width take-up device
- Fabric cutting device



PACKING DIMENSIONS


| KSST-48 | 36" DIAMETER |
|-----------------------------|--|
| Approx. Net weight | 2,500kg |
| Approx. Gross weight | 3,000kg |
| Case size(mm) (Variable) | 2,460 X 2,270 X 2,250 Length Width Height |

*High leg : Approx. 200kg will be added to Net weight




STANDARD DIMENSIONS(36")

*High leg A: 2787 / B: 2164

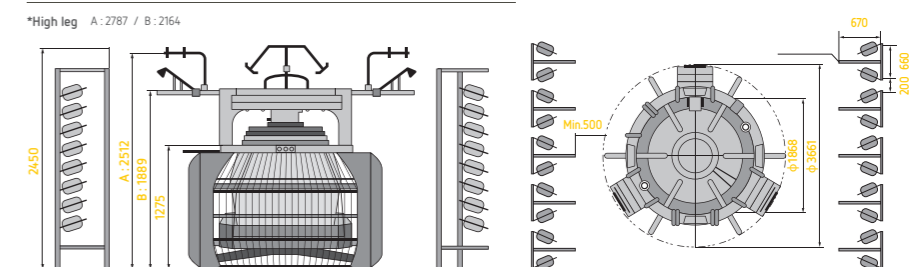

STRUCTURE

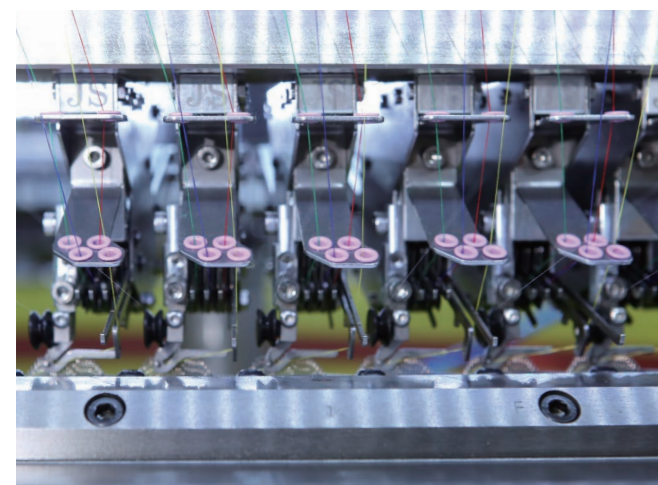

FABRIC POTENTIAL

Fine quality at high production rates with 4 color striper single and single jersey high speed machines in the highest quality fabric such as lacoste, crepe, plating mini-Jacquard fabrics.




FABRIC VARIETY

KSST-72

| DIAMETER(Inch) | 30" | 36" |
|--------------------|---|-----------|
| Gauge | 16G-26G | |
| No. of Feeder | 72F | 84F |
| No. of needle(cut) | 16G/1,512 | 16G/1,800 |
| | 20G/1,896 | 20G/2,256 |
| | 24G/2,256 | 24G/2,712 |
| | 28G/2,640 | 28G/3,168 |
| Speed(RPM) | 20-25 | 16-20 |
| Feeding Device | Positive Feeding Device | |
| Driving | 7.5HP AC Motor & Inverter | |
| Cylinder Cam | 3 Position of needle selection (Knit, Tuck & Miss) by changing cams | |



INTEGRATED CONTROLLER

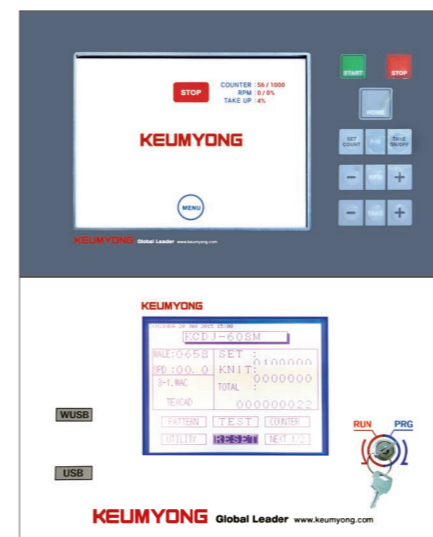

- Fully integrated driving control mode with characters and graphic.
- Self-diagnostic and alarm function.
- Auto take-down tension and speed control system.
- Easy setting method and bar-graphic digital indicating for all functions.