

KEUMYONG

Homepage www.keumyong.com
E-mail kymc@keumyong.com

Head Office & Mfg ADDRESS 57, Paldal-ro 7-gil, Buk-gu, Daegu, KOREA
TEL +82-53-351-3081~7
FAX +82-53-351-8085

Seoul Office ADDRESS 4TH FLOOR, KEUMYONG BLDG. , 275, Gwangnaru-ro, Seongdong-gu, Seoul, KOREA
TEL +82-2-3409-4700/4231~3
FAX +82-2-3409-4040




Catalogue

Double Machine_07

High Speed Plush Knitting Machine

KYPL-V

High Speed Plush Knitting Machine

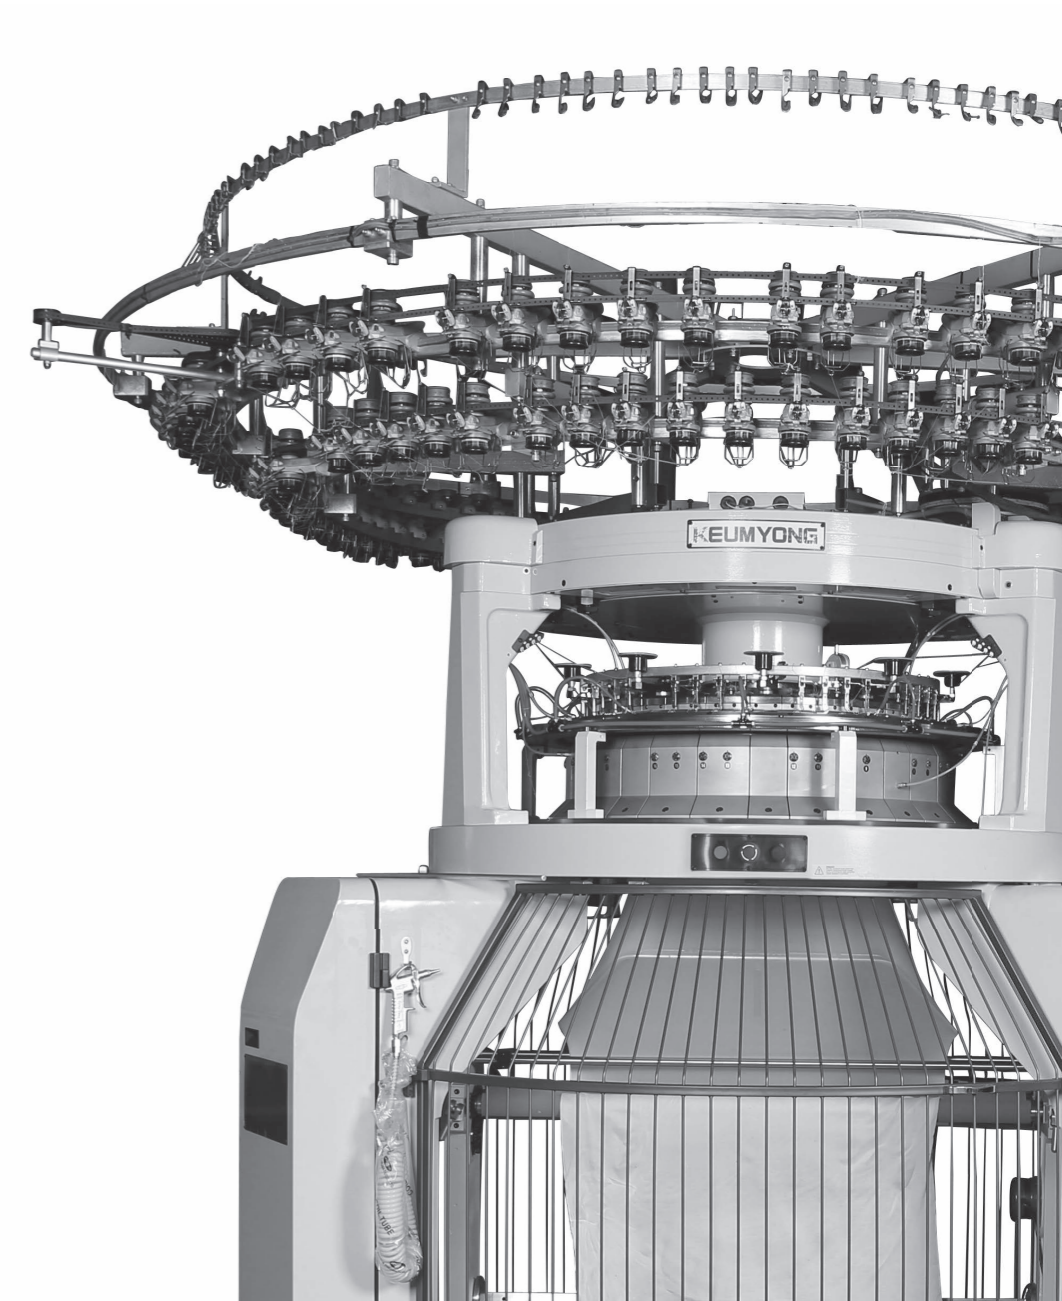

KYPL-V

High Speed Plush Knitting Machine

This plush machine is newly developed to produce high quality pile fabric in mount sinker-dial on double base frame and to provide easy pile-height adjustment, high speed operation, top efficiency and minimum maintenance fee.




STANDARD SPECIFICATIONS


- In combination with cylinder, sinker-dial.
- 4 track cylinder cam for versatility of ground structure.
- Easy adjustment of pile-length.
- AC Motor with inverter control unit.
- Lycra-plating is available.
- MPF-positive feeding device.
- Venti-cleaner.
- Spreader size ring system.
- Cylinder & dial with sinker frame.
- Urethane coated fabric guide(16V, 18V)
- Various lengths of pile by changing cams.

OPTIONAL PARTS

- Real time production monitoring system
- KYMS(Keumyong yarn Measuring System)
- Open width take-up device
- High leg frame for big roll



STRUCTURE

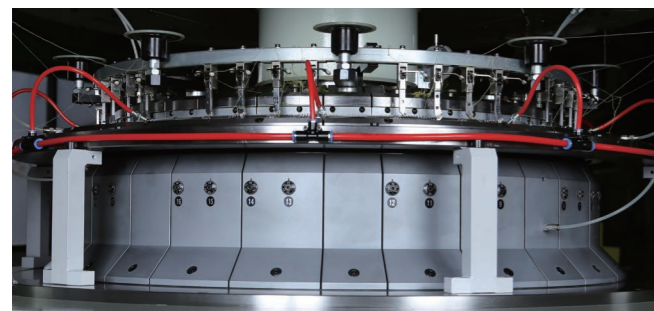

KYPL-16V

- For long pile knitting

KYPL-18V

- For mid-length pile knitting
- Most preferred plush knitting machine

KYPL-20VS

- For high gauge & short pile knitting

Application area

- Blanket, T-shirt, Stuffed toy, Bathrobe, Cleaner



FABRIC VARIETY

KYPL-16V

DIAMETER(Inch)	26"	30"
Gauge(N.Pl)	14-26G	
Feeds	14F	16F
Speed(R.P.M)	18-23	15-20
Sinker	16-25MM	

KYPL-18V


DIAMETER(Inch)	26"	30"	32"	36"
Gauge(N.Pl)	20-28G			
Feeds	16F	18F	20F	22F
Speed(R.P.M)	24-26	22-24	20-22	18-20
Sinker	6-15MM			

KYPL-20VS

DIAMETER(Inch)	30"
Gauge(N.Pl)	30-32G
Feeds	20F
Speed(R.P.M)	28-32
Sinker	3-6MM



INTEGRATED CONTROLLER

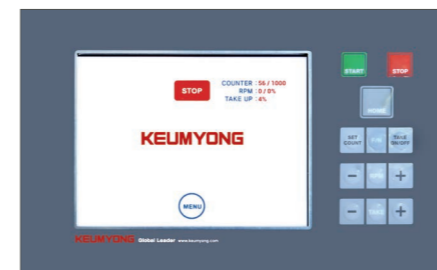

- Fully integrated driving control mode with characters and graphic.
- Self-diagnostic and alarm function.
- Auto take-down tension and speed control system.
- Easy setting method and bar-graphic digital indicating for all functions.



PACKING DIMENSIONS

KYPL-V	30" DIAMETER
Approx. Net weight	2,600kg
Approx. Gross weight	3,000kg
Case size(mm) (Variable)	2,370 X 2,250 X 2,270 Length Width Height

*High leg : Approx. 200kg will be added to Net weight



STANDARD DIMENSIONS(30")

*High leg
A: 2926 / B: 2324

